



HURRICANE™

Intensive Cleaner

NCL®

NATIONAL CHEMICAL LABORATORIES

Stone Care Solutions



DESCRIPTION

Hurricane Intensive Stone Cleaner is a high active, extra strength degreaser, cleaner and grout film remover that is safe for use on natural stone, terrazzo, agglomerate, ceramic and porcelain tiles. Effectively removes dirt deposits, grease accumulation, food stains and petroleum-borne soils without affecting the natural structure of the stone. **HURRICANE** is intended for use as a periodic cleaner where heavy soiling is present, for construction job site clean-up and as an integral part of the **STONE CARE SOLUTIONS Maintenance System**. **HURRICANE** is safe to use on granite, marble, polished limestone, terrazzo, flagstone, clay tile, terra cotta, quarry tile, cantera, ceramic tile, porcelain, slate, pavers, grout, concrete, and masonry.

SPECIFICATIONS

Product type: Water based cleaner

Appearance: Red liquid

Fragrance: Citrus

Specific Gravity: 1.05 ± .02

pH (in dilution): 11.5 - 12.5

Solubility in water: Complete

Actives: 20% ± .5

Safe on Stone: Yes

Flash Point: None

Cleaning Performance: Superior

Grease Removal: Excellent

Oil Removal: Outstanding

Free Rinsing: Yes

DIRECTIONS

For soil removal, job site clean-up and /or grout film removal:

1 part of Hurricane 8-10 parts of warm water for light soil removal

1 part of Hurricane 4-7 parts of warm water for moderate soil removal

1 part of Hurricane 2-3 parts of warm water for heavy soil removal

For periodic intensive cleaning:

1 part of Hurricane 12 parts of cool or warm water for light soil removal

APPLICATION

After diluting chemical, apply solution to surface using a mop, sponge or sprayer and agitate briskly with mop or scrub brush. Allow to dwell for 10 minutes; vacuum and rinse well with clean water and vacuum again. For daily maintenance after restoration, use the SCS Daily Maintenance System (PATINA-HIGHLIGHTER-HURRICANE); see the STONE CARE SOLUTIONS brochure for more information.

DO NOT ALLOW SOLUTION TO DRY ON THE SURFACE.

ALWAYS TEST PRODUCT IN AN INCONSPICUOUS AREA TO DETERMINE SUITABILITY OF THIS PRODUCT FOR THE INTENDED USE.

SAFETY INFORMATION

WARNING: IRRITANT: MAY BE HARMFUL IF SWALLOWED. KEEP OUT OF REACH OF CHILDREN.


Avoid eye contact. Do not ingest For Eyes: Flush with water for 15 minutes.

Get medical aid. If ingested: Do not induce vomiting. Give milk, egg white, gelatin or water.

Warranty: Determining the suitability of this product for its intended purpose shall solely be the responsibility of the user. In the event of failure, the sole obligation of National Chemical Laboratories shall be to replace the product deemed defective. User assumes all risk and liability; neither manufacturer nor seller will be held liable for any injury or damage.

Classified by Underwriters Laboratories® Floor Coatings and Materials For Slip Resistance Only 18EL

NCL®

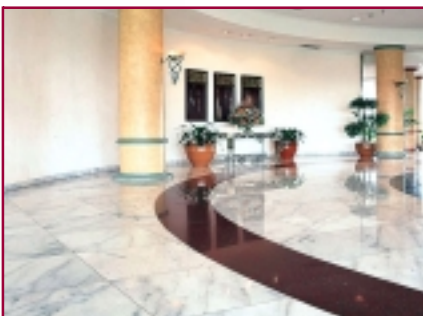

National Chemical Laboratories, Inc.
WORLD CLASS CLEANING SOLUTIONS™
Philadelphia, PA 19123 • (800) NAT-CHEM